

SinoGNSS



Venus Laser RTK

Universe Series GNSS Receiver



LASER RTK - INNOVATION MAKES THE DIFFERENCE

| Venus Laser RTK

Venus is an innovative GNSS receiver combined with laser and IMU. Laser distance meter makes rodless survey possible, enabling GNSS surveying beyond usual constraints. IMU achieves 60° tilt compensation in both traditional and laser modes, supports free calibration and 10-second initialization.

Integrated the SinoGNSS K8 platform, Venus features full-constellation with 1590 channels, providing high-precision measurement results even in harsh environments.



| Features

LASER DISTANCE METER ENABLES RODLESS SURVEY

Innovatively equipped with a laser distance meter, Venus makes rod-free stakeout and measurement possible, greatly expanding the working scope.

SATELLITE TRACKING			SATELLITE TRACKING		
	GPS	L1C/A, L1C, L2P, L2C, L5		QZSS	L1C/A, L2C, L5, L1C
	BDS	B1I, B2I, B3I, B1C, B2a, B2b		IRNSS	L5
	GLONASS	G1, G2, G3		SBAS	L1C/A
	Galileo	E1, E5a, E5b, E6c, E5 AltBOC			

Laser Technology

The fusion of GNSS, IMU and laser technologies pushes working efficiency to the limits and ensures accuracy.




Full-Constellation Multi-Frequency

With 1590 channels and 50+ satellite tracking capabilities, Venus also supports SBAS PPP service. Getting fixed in seconds boosts your productivity.



Third Generation IMU Improves 30% Efficiency

The 3rd generation IMU supports 60° tilt compensation, allows 10-second initialization. No bubble check needed, survey as you will.



Handheld Design, Easy to Carry

Venus is ergonomically designed for easy carrying. The 380g GNSS receiver with sophisticated structure minimizes user fatigue.



Robust Design

Built to IP67 standards, Venus is waterproof and dustproof, completely workable even in harsh environments.



NFC Connection

Venus Laser RTK can be connected automatically with a single touch.



Venus Laser RTK

GNSS Surveying System

Ver.2025.08.06

Signal Tracking

Channel: 1590

GPS: L1C/A, L1C, L2P, L2C, L5

BDS: B1I, B2I, B3I, B1C, B2a, B2b

GLONASS: G1, G2, G3

Galileo: E1, E5a, E5b, E6c, E5 AltBOC

QZSS: L1C/A, L2C, L5, L1C

IRNSS: L5

SBAS: L1C/A

Performance Specification

Signal Re-acquisition: $\leq 1s$

Cold Start: $\leq 45s$

Hot start: $\leq 15s$

RTK Initialization Time: $< 10s$ (Baseline $\leq 10km$)

Initialization reliability: $\geq 99\%$

Data Update Rate: 1Hz, 2Hz, 5Hz, 10Hz, 20Hz

Mode	Accuracy
Static and Fast Static	Horizontal 2.5 mm + 0.5 ppm RMS Vertical 5 mm + 0.5 ppm RMS
Single Baseline RTK	Horizontal 8mm + 1ppm RMS Vertical 15mm + 1ppm RMS
DGPS	$< 0.4m$ RMS
SBAS	Horizontal 0.5 RMS Vertical 0.8 RMS
Standalone	1.5m 3D RMS
Laser Tilt Measurement	$\leq 5.5cm$ (2m range, $\leq 60^\circ$ Tilt in handheld mode)

Data Format

Correction data I/O: RTCM2.X, 3.X, CMR (GPSonly), CMR+ (GPSonly)

Position data output: - ASCII: NMEA-0183 GSV, RMC, HDT, GGA,
GSA, ZDA, VTG, GST; PTNL, PJK; PTNL, GGK
- ComNav Binary update to 20 Hz

Electrical and Battery

Voltage: 5/9V

Power Consumption: 1.45W

Over Current Protection Voltage: 30V, VBUS 9.99V

Charging Time: $< 4h$ (QC2.0)

Working time: $\geq 20h$

Communication

Bluetooth: 5.0 Dual-Mode Bluetooth

NFC: NFC Fast Connection

Interface: USB TYPE-C

Environmental Specification

Working Temperature: $-20^\circ C \sim +60^\circ C$

Storage Temperature: $-30^\circ C \sim +70^\circ C$

Humidity: 100% non-condensing

Water- & Dustproof: IP67

Shock: Survive a 2m drop onto the concrete

Vibration: MIL-STD-810G Method 514.6 procedure I

Physical Specification

Housing Material: Plastic

Dimension: 80 $\pm$ 1mm(L), 70 $\pm$ 1mm(W), 150 $\pm$ 1mm(H)

Weight: 380g

Range Pole Interface: M8 thread

Laser Specification

Range: 10m

Accuracy (room temperature): (3-5)mm + 1ppm

Measuring Frequency: Classic Value: 3Hz

Maximum Value: 5Hz

Laser Injection Power: 0.9mW~1.5mW

Working Temperature: $-20^\circ C \sim +50^\circ C$

Storage Temperature: $-30^\circ C \sim +60^\circ C$

Specifications subject to change without notice.

ComNav Technology Ltd.

Building 2, No. 618 Chengliu Middle Road,
201801 Shanghai, China

Tel : +86 21 64056796

Fax: +86 21 54309582

Email: sales@comnavtech.com

www.comnavtech.com



| R80 Data Collector

Elegant yet Powerful New Design,
Featuring **13-Megapixel** Camera

6" Touch Display with
720*1080 Resolution,
500 nits Brightness

8-Core Processor
4+64 GB Memory

Android 12.0
Operating System

IP67 Waterproof
and Dustproof

Support **4G**,
Ultra-Distance
Bluetooth®,
Wi-Fi, **NFC**

9000mAh Li-Polymer
Battery, Support QC &
PD Fast Charging

2 Side-mounted Data
Collection Buttons

White Backlight Keyboard
with **51** Buttons



Qualcomm



1080P Resolution



6" Display



Full QWERTY



Android 12



QC Quick Charging



IP67

| Software

Survey Master

Compatible with most of Android devices

Easier survey workflow via Wizard function

Support up to 60° IMU tilt compensation

Support all survey modes, including Static, PPK and RTK

Support Surface Stake, Mapping Survey and etc. to serve various survey tasks

Support CAD import and directly use for stake out operations

Support Convert function from ComNavBinary raw file to RINEX

Optional




Microsurvey FieldGenius

Android




Microsurvey FieldGenius


Windows

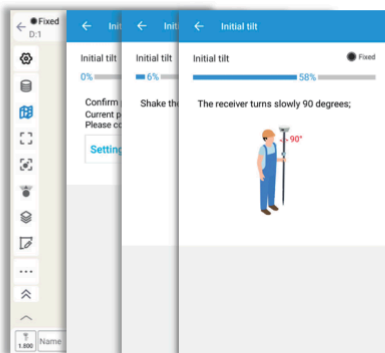

IMU Tilt Survey

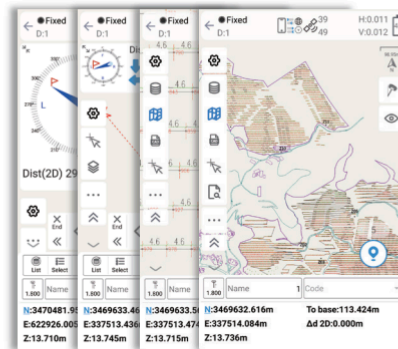

CAD Basemap and Stake

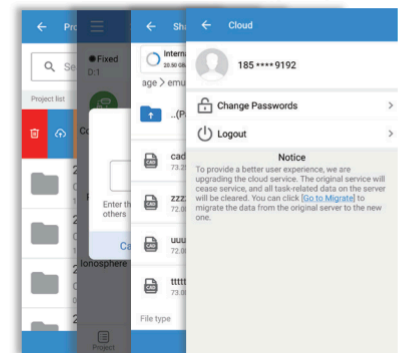

Cloud Service

Post-processing Software

SinoGNSS Compass solution software

Provide the complete GPS/GLONASS/BeiDou/GALILEO post-processing solution

Support GNSS observation data in RINEX and ComNav Raw Binary Data format

Support different post-processing in static and kinematic modes

Output analysis reports in various formats (web format, DXF, TXT, KML)

Supports DJI's P4R data format. Processing results can be imported into photogrammetry and 3D modeling software directly

